

Industrial Pressure Washers ...Built Right to Do the Job Right

VNG

Stationary, Natural Gas-Heated, Hot Water Pressure Washer with Multiple-Gun Option


- *Up to 10 GPM*; Up to 3000 PSI
- Belt-Driven Pump with 7-year Warranty
- Smart Control
- Electronic Ignition
- Remote Options



- Industrial-strength Motor and cast-iron, bushing Pulleys use a convenient 2-bolt pulley adjustment for easy maintenance and longer life; notched, heat-reducing, "V" cogged belts connect the motor to the rugged High-Pressure Pump with three ceramic plungers, a forged brass head and a unique design that results in lower RPM than comparable pumps for less maintenance and a longer life. The pump also is backed by a 7-year warranty.
- Brass, anti-syphon **Detergent** Metering Valve locks out air and dispenses precise amount of cleaning agent.

- Extra-durable **Heating Coil** made of leak-free, cold-rolled, Schedule 80 steel pipe with five-year warranty.
- Rugged Steel Cabinet, with vented panels, is painted with an epoxy powder
- coat finish for all-weather protection.
- Helpful Tri-Lingual Labels with operating instructions in English, Spanish and French for owner and operator protection.
- EASY!Force trigger gun with cruise control like technology uses its own recoil force to hold the triager down - so, no more sore hands after hours of use.
- Industrial grade overload protected Control Switches provide years of reliable
- Consolidated Plumbing means both the water supply inlet and the quick-couple, high-pressure outlet are next to each other for ease
- Four quick-couple Nozzles are made of hardened stainless steel and mounted for ready access.





PROGRAMMABLE SMART CONTROL now standard for all VNG machines allows auto start/stop and time delay shutdown features without changing any hardware. It also provides complete control of the equipment run time.

- Rust-free, Stainless Steel Float Tank with stainless steel inlet filter and low-turbulence float valve allows for high-pressure application of detergent.
- Many Safety Features, including automatic time-delay shutdown, rupture disk and thermal pump protector to prevent the buildup of excessive pressures or heat.






options and thermal

overload protection.






- Electronic Ignition comes standard eliminating the hassle of having to constantly light the pilot flame.
- Top-of-the-line **Tuff-Skin** Hose has 24-inch hose guard for burst protection and seven times the abrasion resistance as other high-pressure hoses; rated up to 6000 PSI

www.landa.com



WHY CHOOSE THE VNG?

A variety of exciting options and features make the VNG one of the most versatile machines in the industry. Housed in an attractive and sturdy metal cabinet, this machines offers easy access to its control panel and indicator lights. The VNG is loaded with quality and safety features throughout and is flexible enough to support up to four optional remote wash stations, making it the industry standard for natural gas heated hot water pressure washers.

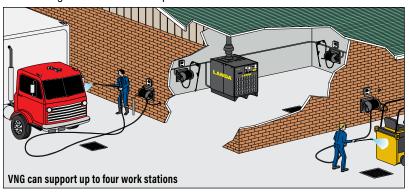



| Model # | Part # | GPM | PSI | Pump RPM | Pump | Motor HP | Volts | Phase | Amps | Approx BTUs | Ship Wt (lbs) |
|--------------------------|-------------|------|------|----------|-----------|----------|-------|-------|------|-------------|---------------|
| VNG4-20024A | 1.109-563.0 | 4.0 | 2000 | 930 | LT6036R.2 | 6.2 | 230 | 1 | 27 | 360,000 | 1010 |
| VNG4-20024B | 1.109-564.0 | 4.0 | 2000 | 930 | LT6036R.2 | 6.2 | 230 | 3 | 15 | 360,000 | 990 |
| VNG4-20024C | 1.109-565.0 | 4.0 | 2000 | 930 | LT6036R.2 | 6.2 | 460 | 3 | 8 | 360,000 | 990 |
| VNG4-20024H | 1.109-568.0 | 4.0 | 2000 | 930 | LT6036R.2 | 6.2 | 208 | 3 | 18 | 360,000 | 1000 |
| VNG4-30024A | 1.109-569.0 | 3.9 | 3000 | 775 | LT6036R.2 | 8.2 | 230 | 1 | 36 | 354,000 | 1030 |
| VNG4-30024B | 1.109-570.0 | 3.9 | 3000 | 775 | LT6036R.2 | 8.2 | 230 | 3 | 25 | 354,000 | 1030 |
| VNG4-30024C | 1.109-571.0 | 3.9 | 3000 | 775 | LT6036R.2 | 8.2 | 460 | 3 | 15 | 354,000 | 1030 |
| VNG4-30024H | 1.109-574.0 | 3.9 | 3000 | 775 | LT6036R.2 | 8.2 | 208 | 3 | 27 | 354,000 | 1010 |
| VNG6-30024B | 1.109-575.0 | 6.0 | 3000 | 1525 | LT6036L.2 | 15.0 | 230 | 3 | 39 | 507,000 | 1830 |
| VNG6-30024C | 1.109-576.0 | 6.0 | 3000 | 1525 | LT6036L.2 | 15.0 | 460 | 3 | 19 | 507,000 | 1830 |
| VNG8-30024B ‡ | 1.109-579.0 | 8.0 | 3000 | 1370 | LX9536L.2 | 20.0 | 230 | 3 | 52 | 658,000 | 1845 |
| VNG8-30024C [‡] | 1.109-580.0 | 8.0 | 3000 | 1370 | LX9536L.2 | 20.0 | 460 | 3 | 26 | 658,000 | 1845 |
| VNG8-30024H [‡] | 1.109-582.0 | 8.0 | 3000 | 1370 | LX9536L.2 | 20.0 | 208 | 3 | 54 | 658,000 | 1845 |
| VNG10-20024B ‡ | 1.109-559.0 | 10.0 | 2000 | 1630 | LX1036L.2 | 20.0 | 230 | 3 | 46 | 816,000 | 1925 |
| VNG10-20024C ‡ | 1.109-560.0 | 10.0 | 2000 | 1630 | LX1036L.2 | 20.0 | 460 | 3 | 23 | 816,000 | 1925 |

Dimensions: VNG4 45"L x 36"W x 48"H VNG6/VNG8/VNG10 70"L x 43"W x 57"H ‡ EASY!Force not available on this model.

Field Installed Options & Accessories

Available for All Models

8.924-815.0Remote Operator Station Kit8.924-816.0Electronic Detergent Kit8.924-814.0Wireless 6 Channel Remote Kit8.924-878.0Wall Mount Remote Bracket Kit9.801-040.0Draft Diverter, 10" (for models up to 4 GPM)8.717-730.0Draft Diverter, 12" (for models over 4 GPM)

Distributed by:

Field Installed Options & Accessories

LP-Gas Conversion Kits

9.801-019.0 LP Conversion Kit (for models up to 4 GPM) ◆
8.904-068.0 LP Conversion Kit (for models over 4 GPM) ◆

9.802-633.0 LP Regulator Assembly

Options For Older VNG Units Only [Pre Smart Control]

8.941-545.0 Additional LanCom Remote

8.930-131.0 Wall Mount Bracket for Fixed LanCom Remote

◆ Factory Installed

DETERGENT FOR EVERY JOB

Landa Kärcher Group's innovative detergent lineup makes your cleaning job easier and faster. Phosphate-free to meet the most stringent environmental demands without sacrificing cleaning effectiveness. We'll match you with a product designed for your specific application.

